
The dynamic response of the bicycle rider's body to vertical, fore-and-aft and lateral perturbations

Georgios Dialynas¹, Jelle W. de Haan¹, Alfred C. Schouten¹, Riender Happee¹, A. L. Schwab¹

Abstract

The objective of this study was to identify the dynamic response of the bicycle rider's body during translational perturbations, in an effort to improve two-wheeler safety and comfort. A bicycle mock-up was equipped with sensors measuring 3D seat and trunk accelerations and riders force responses at the seat, handlebars and footpegs. The bicycle mock-up was driven by a hexapod motion platform that generated random noise perturbations in the range of 0-10 Hz. Twenty-four healthy male adults participated in this study. Responses are represented as frequency response functions capturing: 3D force interactions of the riders body at the seat, handlebars and footpegs in terms of apparent mass (APMS), and rider's trunk motion (1D) as function of seat motion as seat to sternum transmissibility (STST). Results showed that the vertical and longitudinal APMS for most of the bicycle interfaces followed the resonance of the STST. A twice as high magnitude was observed at the resonance, although a more heavily damped system was apparent in the STST. Resonant frequencies were considerably higher in the vertical direction compared to the longitudinal direction. Different dynamics were observed for the lateral measurements, where all magnitudes decreased after the base frequency, and no resonance was observed.

Keywords

bicycle dynamics, rider identification, whole-body vibration, apparent mass, transmissibility

Introduction

In cycling the rider's mass is much larger than the vehicle mass. Hence, the rider can contribute considerably to the dynamic behaviour of the bicycle, not only by means of voluntary control actions, but also by means of the passive biomechanics of his/her body. The rider's body consists of inertial and visco-elastic properties that interact with the bicycle and affect the dynamic response of the combined system. The stabilization of dangerous oscillatory two-wheeler modes such as weave¹ and wobble² are influenced by the rider's biomechanical properties. Therefore, a biomechanical model with human-like properties needs to be included to study the dynamic behaviour of the combined bicycle-rider system.

In the automotive field the biodynamic response of seated subjects exposed to whole body vibration (WBV) have been extensively reported in terms of the apparent mass (APMS). Fairley and Griffin et al. (1990)³ measured the APMS of seated humans with and without backrest in the fore-aft and lateral directions. Mansfield and Lundström (1999)⁴ measured the APMS of seated humans exposed to non-orthogonal horizontal vibrations. Rakheja et al. (2002)⁵ and Toward and Griffin (2010)⁶ measured the APMS of seated humans under automotive postures hands-in-lap (e.g., passengers) and hands-on-steering wheel (e.g., drivers) in the vertical direction. Toward and Griffin (2011)⁷ measured the vertical APMS of seated humans for four different backrest conditions. Wang et al. (2004)⁸ and Kim et al. (2012)⁹ reported the vertical APMS for different sitting postures and seat designs. Gao et al. (2011)¹⁰ conducted similar

experiments as Toward and Griffin (2011)⁷. A simple two-mass-lumped model was adopted to describe the vertical vibration characteristics of the seated human body. The APMS predicted by the established model agreed very well with those obtained from experiments. In general, body mass dependent models are successful in predicting the apparent mass and transmissibility responses of a seated human body¹¹. The driving point mechanical impedance, seat-to-head transmissibility and apparent mass are the principal characteristics used to describe the biodynamic response of a seated human body under WBV in the automotive sector. The apparent mass is popular, as it is straightforward in physics and can be measured conveniently. A review on the fundamentals of biomechanical modelling of the human body in transport systems is presented by Wieckowski (2011)¹².

In the field of two-wheelers no study was found reporting the APMS of seated rider's exposed to translational perturbations. Most studies focus on rotational motions and measure different biodynamic characteristics. E.g. Katayama et al. (1987)¹³ measured the center of mass and moment of inertia for normal and forward-leaning riding positions and proposed two different biomechanical models to describe

¹Biomechanical Engineering, Delft University of Technology, Mekelweg 2, 2628 CD Delft, The Netherlands

Corresponding author:

Georgios Dialynas, TU Delft bicycle laboratory, Mekelweg 2, 2628 CD Delft, Netherlands

Email: g.dialynas@tudelft.nl

the passive biomechanics of the rider's body. One of these models has two degrees of freedom (DOF) concerning leaning motion of the trunk and lateral movement of the lower trunk, the other model describes the yaw motions of upper and lower body segments. These models, however, have not yet been experimentally validated. Cossalter et al. (2011)¹⁴ generated steer torque perturbations using a motorcycle simulator to identify the visco-elastic properties of the rider's arms (i.e., steering impedance) and trunk. A two DOF model was adopted for this purpose, but the coefficient of variation (ratio of the standard deviation to the mean) of the identified arm properties was quite large. The variations were possibly due to differences in the physique and riding experience of the participants. Doria and Tognazzo (2014)¹⁵ generated yaw perturbations using a motorcycle mock-up and developed two biomechanical models to simulate the response of the rider to yaw and steer oscillations. Predictions of the one DOF model were successful below 4 Hz, whereas the two DOF model captured the whole frequency bandwidth of 0-10 Hz. The identified values of stiffness and damping of waist and arms were in good agreement between the two models. Doria et al. (2013)¹⁶ used a motorcycle mock-up and Doria and Tognazzo (2014)¹⁷ a bicycle mock-up to generate roll perturbations and measured the riders trunk lean stiffness and steering impedance. Biomechanical models with up to five DOF were used in the first study. In the second study a similar approach to the one of Schwab et al. (2012)¹⁸ was followed to model and analyze effects of the passive response of the riders body on the stability of a bicycle. Similar results with Doria and Tognazzo (2012)¹⁵ were observed for the one, two and three DOF models. The five DOF model which included a detailed description of the arms stiffness and damping properties was able to simulate accurately both the lean and torque responses.

The aim of this study is to identify the dynamic response of the rider's body at all interfaces and in all three translational directions. The response of the rider's body is represented in the frequency domain by means of frequency response functions (FRFs). More specific, the interaction of the rider's body in the seat, handlebars and footpegs is expressed in terms of APMS and as seat-to-sternum transmissibility (STST) functions. The paper is organized as follows: First, the experimental set-up, the perturbation signal design and experimental procedure are presented. Next, the results, including STST and APMS, are presented. The article ends with a discussion and conclusion section highlighting the main findings.

Methods

Description of experimental set-up

To identify the rider's body response to whole body vibration a dedicated modular experimental set-up was developed, consisting of a custom made bicycle mock-up placed on an industrial high-end hexapod, see figure 1 (a). The experimental set-up is able to perturb and monitor the riders body in a wide frequency range (0-12 Hz), while keeping the rider in an upright riding posture similar to that of a city bike. The mechanical structure of the bicycle mock-up consists of standard bicycle parts and steel tubes held together with aluminum clamps. The steering assembly is fixed and the footpegs are placed symmetrically in order to obtain comparable results between the two sides. The geometry of the bicycle mock-up is based on the dutch city bike Batavus Browser (56 cm). The fundamental geometrical dimensions of the constructed frame, together with a seated rider are presented in figure 1 (b): (D) declares the seat post inclination which is 72 deg, (E) is the head angle which is 12 deg, (TT) is the top tube length which is 68 cm, (RTH), (STH) are the reach and stack to handlebars dimensions which are 44 cm and 75 cm, respectively. The average seated rider had an upper trunk inclination (A) of approximately 20 deg, a knee (B), and ankle angle (C) of about 90 and 75 deg, respectively. The later applies to the body build of the 95% of the male European population¹⁹.

The bicycle mock-up is equipped with an inertial measurement unit (IMU) and a total of 13 full-bridge strain gauge sensors in half-bridge configuration to measure the motion and the forces at the interfaces. Six half-bridges are located at each handlebar, four at each footpeg and six at the seatpost. A side view of the locations of the half-bridges is shown in figure 2. With the strain gauge configuration, the rider's force responses in all interfaces and directions can be measured (except for the footpegs forces in lateral Y-axis, where no relevant force responses are expected). Laboratory tests were performed to determine the optimal location of the strain gauges on the handlebars, minimizing the potential geometrical and crosstalk effects. For instance, the strain gauges that measure the vertical and longitudinal applied handlebar loads (i.e., Z, X-axis) were placed immediately after the tapered clamping area. On the other hand, the strain gauges that measure the lateral applied handlebar loads (i.e., Y-axis) were placed near the grips to avoid any geometrical artifact due to the handlebar curvature, see figure 2 (a). The footpeg and saddle strain gauges were placed as close as possible to the mounting area of the bicycle frame, see figure 2 (b) and (c). Crosstalk, the influence of forces from the non-measuring direction, was subtracted from the strain gauge measurements.

A data acquisition system from National Instruments (LabVIEW) and MTW Awinda (Xsens software) sampled the strain gauges and IMU signals at 100 Hz. The bicycle mock-up was mounted on the top of a hexapod from E2M Technologies. The hexapod provides a sufficient response up to around 10 Hz; for higher frequencies there was observable latency in the system. The perturbation signals were designed in Matlab and were implemented in the platform using the eMove eM6-670 electric motion system of the hexapod.

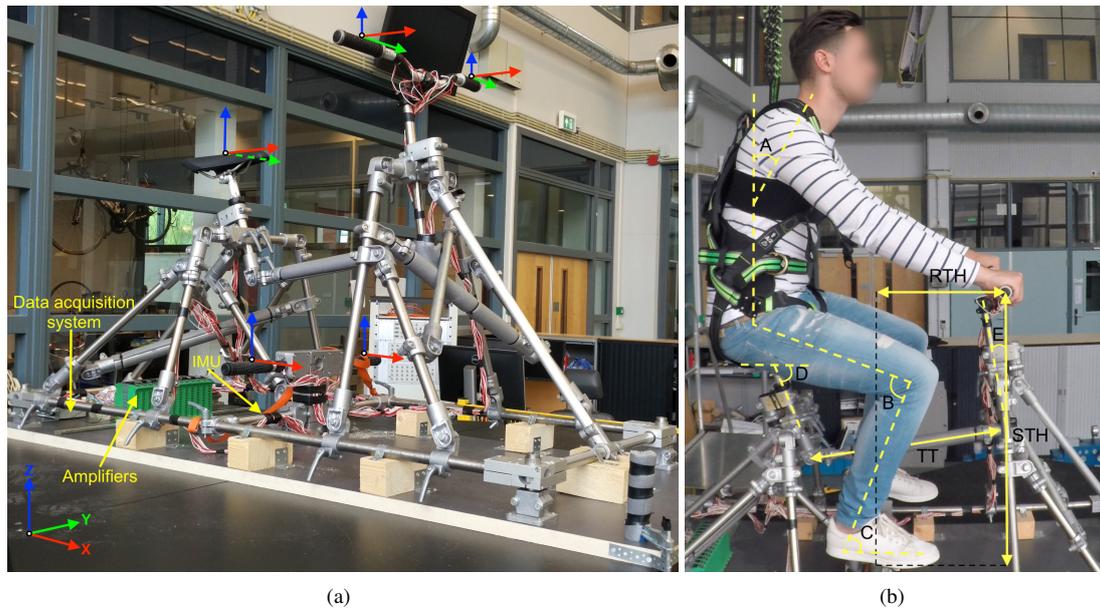


Figure 1. Bicycle mock-up without and with seated rider, (a) location of sensors and amplifiers, (b) basic frame dimensions with seated rider and safety harness.

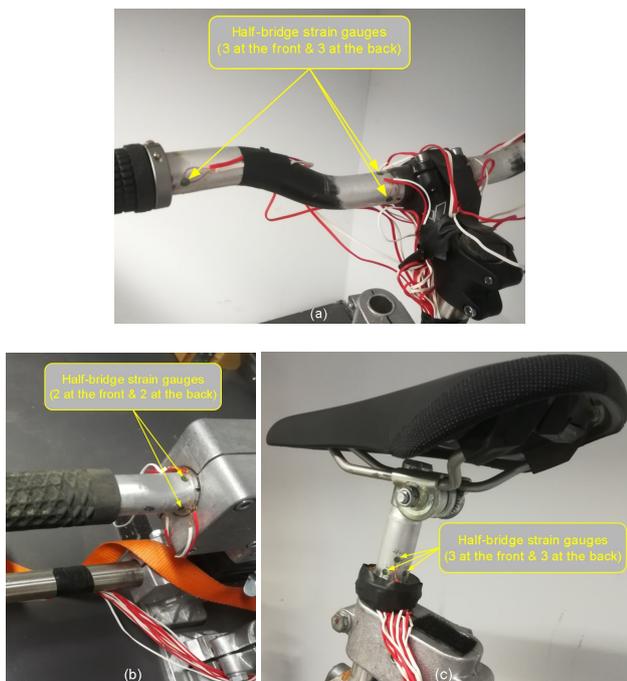


Figure 2. Locations of the strain gauges at the bicycle interfaces, (a) left handlebar, (b) left footpeg, and (c) seatpost.

Perturbation signal selection and design

In the automotive field, random noise oscillations with different bandwidths and magnitudes are typically applied to identify the APMS of seated humans. Fairley and Griffin (1990)³ used random noise perturbations in which the frequency bandwidth was limited between 0.25-20 Hz, the acceleration spectral density was flat $\pm 5\%$ and the maximum magnitude was set 1 ms^{-2} rms. Toward and Griffin (2010)⁶, Toward and Griffin (2011)⁷ and Gao et al. (2011)¹⁰ used random noise perturbations with a duration of 60 seconds and a maximum acceleration magnitude of 1 ms^{-2} and

2 ms^{-2} rms, respectively. The frequency bandwidth was limited using 8-pole Butterworth filters between 0.13-40 Hz, 0.125-25 Hz and 1-20 Hz, respectively.

In the field of two-wheelers frequency sweep perturbations are commonly used to excite the seated rider. Cossalter et al. (2011)¹⁴ used steer sine-sweep excitations with a duration of 200 seconds, a mean amplitude of 2 deg and a frequency range 0.5-12 Hz. Doria and Tognazzo (2012)¹⁵ used yaw sine-sweep excitations with a duration of 115 seconds, a mean amplitude of 2 deg and frequency range 0.510 Hz. Doria et al. (2013)¹⁶ and Doria and Tognazzo (2014)¹⁷ used roll sine-sweep oscillations initial amplitude was set to 1.5 deg, duration and frequency range remained the same as previous study. To avoid rider discomfort, the amplitude was decreased at higher frequencies by dividing with the square root of the instantaneous angular frequency.

In general, an optimal perturbation signal requires prior knowledge of the system and the expected noise characteristics²⁰. Since the dynamics of the passive bicycle-rider system are unknown, filtered white-noise was used to excite the rider's body. A 5-pole Butterworth filter with a cut-off frequency of 9 Hz was used to filter the white-noise signal. With the filter the signal is concentrated in the frequency bandwidth 0-9 Hz and thereby improving the SNR. The maximum perturbation amplitudes and rms for the translational signals were selected based on naturalistic cycling data collected from Ouden and Schwab (2011)²¹, see table 1.

Table 1. Amplitudes of perturbation signals in the three translational directions including mean (μ) and root mean square (*rms*) values.

	Heave Z (m/s^2)	Surge X (m/s^2)	Sway Y (m/s^2)
Van den Ouden	1.0	1.5	1.0
max. amplitudes	1.0	0.75	0.75
mean	4.25e-05	-2.62e-04	-6.11e-04
rms	0.33	0.25	0.25

For safety and comfort, the acceleration of all perturbation signals was limited to 1 ms^{-2} rms. The selected frequency bandwidth includes the oscillation frequencies of dangerous oscillatory modes such as weave (0-4 Hz) and wobble (0-9 Hz) observed by Meijaard et al. (2007)¹ and Plöchl et al. (2012)². The filtered white noise signals had a duration of 60 seconds, see figure 3 as an example of the heave acceleration signal $p(t)$.

Procedure

Twenty-four healthy men (mean age = 26 ± 3 years, weight = 81.7 ± 7.4 kg, height = 181 ± 7 cm) volunteered in this study. To assure safety a full body safety harness was used as a fall arrest system during the experiments. All participants gave informed consent according to the guidelines of the human research ethics committee of the Delft University of Technology. Women were not included due to their different body build. Participants self reported that they did not experience any kind of pain or injury in the year before the experiments. The mean weight of the participants was selected to be close to the European population²², whereas the height is close to the mean height of young European men²³.

Each experimental trial had a duration of 69 seconds consisting of a 4.5 seconds fade-in period, 60 seconds perturbation signal $p(t)$, and a 4.5 seconds fade-out period. The fade-in and fade-out periods were included to minimize transient behaviour and to prevent abrupt platform motions. Two repetitions of the same trial were performed for every motion. Repeatability was good between the two trials for all acceleration and force measurements (standard error of the mean (SEM) was kept to $\pm 8\%$). The results from both trials were averaged and shown in the frequency domain analysis.

Data recording and processing

Subjective measures

The participants completed a subjective assessment immediately after finishing the experiment. A NASA "Raw-TLX" questionnaire was used to evaluate the perceived workload, effectiveness and other aspects of performance²⁴. The NASA-TLX includes six sub-scales with scores ranging from 0-100%, from which the experimental workload is assessed.

Static and dynamic force measurements

For each motion the static forces and dynamic forces in the time domain are used as a measure to indicate dominant force directions at the three interfaces. The static force is a measure of the gravitational forces that the rider's body mass exerts at all bicycle interfaces and is calculated as the average of the mean force over the participants. The dynamic force is a measure of behaviour during the experimental trials and is computed as the rms of the force signal, see table 2.

Transfer functions

The block diagram of the motion platform combined with the passive rider is presented in figure 4, where $p(t)$ is the input perturbation signal to the motion platform $E(t)$, $u(t)$ is the input to the passive rider $H(t)$, $n(t)$ is additional noise and

$y(t)$ is the rider output response. Note that the rider cannot influence the motion of the platform, as would be possible with a normal bike.

The dynamics of the rider are described based on the input-output relationship of the measured signals in the frequency domain. The STST and APMS are defined as ratios and calculated as transfer functions using the cross-spectral density (CSD) method defined by Mansfield (2004)²⁵ and Griffin (2012)²⁶:

$$TF_{CSD}(f) = \frac{CSD_{input-output}(f)}{PSD_{input}(f)} \quad (1)$$

The linear correlation between the input and output is expressed in terms of the coherence, see equation 2. Coherence ranges from 0 to 1, where one reflects a perfect, noise-free linear relation.

$$Coherence(f)^2 = \frac{|CSD_{input-output}(f)|^2}{PSD_{input}(f) \times PSD_{output}(f)} \quad (2)$$

The transfer functions of the STST and APMS of the rider's body are estimated using Welch' method in which the spectral densities are averaged over 10 segments²⁷. The dynamic responses of the left and right handlebar and footpeg side appeared symmetrical, therefore the results of the left and right side are merged as the mean resultant forces and APMSs. The mean magnitude and SD is calculated over all subjects, however for the phase a different approach is used. The mean phase is calculated by taking the angle of the average complex number, whereas the SD by estimating the circular standard deviation. The SD is displayed as a shaded area around the mean line. The coherence significance level (CSL) is shown as a dashed line in the coherence plots. A Hanning window with 50% segment overlap is used to prevent frequency leakage and the 5 independent segments results in a CSL of 0.53 with probability $p < 0.05$ ²⁸. The SD demonstrates the variability in the behaviour between the participants, whereas CSL underlines the confidence interval of the spectral estimator.

Seat-to-sternum transmissibility (STST)

Measurement of the transmission of vibration between the bicycle mock-up and rider's upper body is expressed in terms of transmissibility. Transmissibility $T(f)$ is defined as the ratio of the acceleration at a point on the body to the acceleration at the base of the mock-up:

$$T(f) = \frac{a_{body}(f)}{a_{base}(f)} \quad (3)$$

To measure the transmissibility an additional IMU was mounted on the rider's sternum, see figure 5 for the exact locations of the two IMUs. The IMU of the rider's sternum was placed between two elastic stretch bands to avoid local displacements due to skin movements. Because that the accelerations of the bicycle base and seat are identical, the term STST is used herein to express the acceleration transmissibility measurements between the seat base and rider's sternum. For all motions the acceleration measurements were transformed to the inertial reference frame, all sign conventions follow the right-handed Cartesian

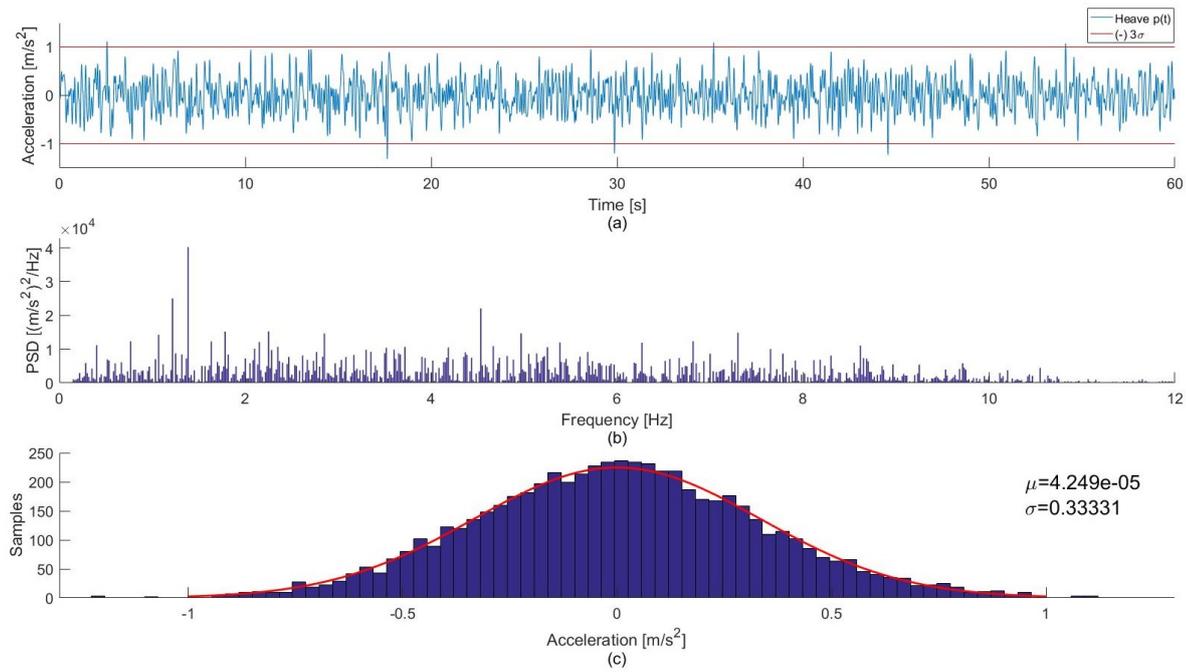


Figure 3. Profile of heave acceleration signal $p(t)$, (a) signal in the time domain (red lines indicate $\mu-3\sigma$ and $\mu+3\sigma$), (b) acceleration spectral density and (c) amplitude distribution.

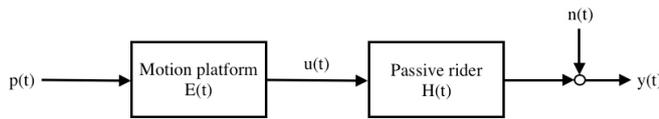


Figure 4. Block diagram of motion platform combined with passive rider system.

coordinate system, see figure 5. In other words, all accelerations are positive in the forward (X-axis), left (Y-axis) and upward direction (Z-axis), respectively.

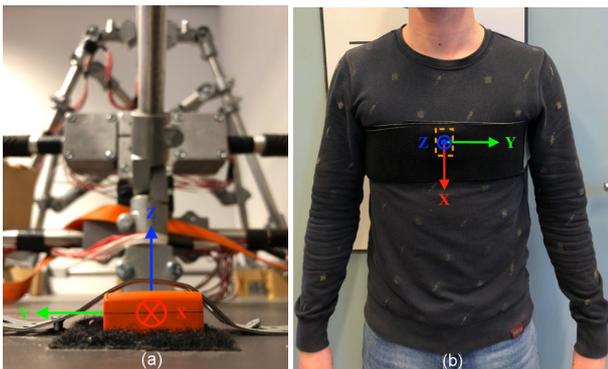


Figure 5. Locations of the IMUs with right-handed Cartesian coordinate system, (a) back view of motion platform and (b) front view of rider's sternum.

Apparent mass (APMS)

The measurement of the transmission of forces between the rider's body and the bicycle interfaces is expressed in terms of apparent mass. Apparent mass $M(f)$ is defined as the ratio

of the applied force at the interfaces to the acceleration at the base of the mock-up at a frequency (f), see equation 4.

$$M(f) = \frac{F(f)}{a(f)}, \quad (4)$$

For all motions the APMS measurements follow the sign conventions of the right-handed Cartesian coordinate system, see figure 1 (a). This implies that all forces exerted from the bicycle to the rider are positive in the forward (X-axis), left (Y-axis) and upward direction (Z-axis), respectively.

Results

NASA-TLX

Results of the NASA-TLX are summarized in figure 6. Two clusters can be identified when correlating the performance and effort scale. The first cluster (16 subjects) indicates high performance (>50%) with low effort (<40%). The second cluster (8 subjects) indicates high workload with poor performance. The scores of the second group are indicated with black markers in figure 6 and also explain the outliers in mental demand and frustration. There were no differences between the groups in the STST and APMS (see supplementary material, STST_individual figure). The results of the subjective workload scores show the highest score for performance (83% median), and the lowest score for frustration (8% median). Mental, physical, temporal and effort demand score between 13-25% median reflecting the passive nature of the experiments.

Static and dynamic force distribution

Table 2 presents the static and dynamic force distribution at all bicycle interfaces and directions. The large ratio between the static and dynamic forces indicates that the magnitude of the (static) gravitational forces is much larger

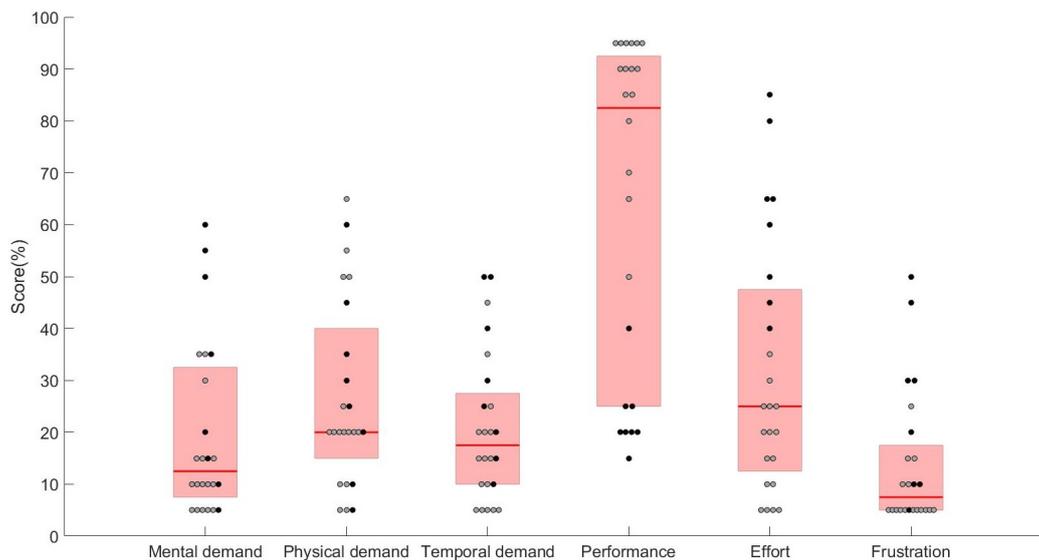


Figure 6. Boxplots of the NASA Task Load Index (TLX) scores for the 24 participants.

than the magnitude of the forces resulting from the dynamic perturbations. Due to bicycle geometry and rider posture, symmetry is expected in the dynamic force distribution at the ZX, ZY-plane for all motions. To indicate symmetry the dynamic force distribution matrix was decomposed into a symmetric and an asymmetric part (see supplementary material, table 3). The symmetric part was calculated by taking the mean of the dynamic force cross-terms (ZX, ZY, XY) for every motion, whereas, the asymmetric part by subtracting the later from the dynamic force part.

For heave and surge the interactions at the seat (SP) indicated higher correlation in the ZX-plane compared to the ZY-plane, symmetric coefficients were 7.5 and 3.5, respectively. Correlation was also higher in the ZY-plane compared to the XY-plane for the surge and sway motion, coefficients were 3.5 and 2.5 for the former and latter plane. Footpegs (FP) showed perfect symmetry, and handlebars (HB) had a symmetric correlation coefficient of 1.5 for all planes and bicycle motions.

For heave, dynamic forces are mainly observed at the seat (SP_Z) followed by the footpegs (FP_Z) and the handlebars (HB_Z). The forces in the longitudinal direction of the seat (SP_X) are mainly due to the bicycle geometry, while the forces in the lateral direction of seat (SP_Y) are probably due to asymmetry of the human body. The lateral forces in the left (HBL_Y) and right handlebar (HBR_Y) might be a result of lateral handlebar deformation induced by the vertical and longitudinal applied forces.

For surge, dynamic forces are generated in the longitudinal (SP_X) and vertical (SP_Z) direction of the seat, followed by the handlebars (HB_X) and (HB_Z). Footpegs show similar forces at the longitudinal (FP_X) and vertical (FP_Z) directions. Forces in the vertical direction are presumably a result of rider posture and anterior/posterior trunk movements.

For sway, dynamic forces are present in the lateral seat direction (SP_Y) followed by (SP_Z) and (SP_X). At the footpegs and handlebars forces are more dominant at the vertical direction. It is evident that the rider co-activates his

leg and arm muscles (i.e, vertical foot and handlebar forces) to reduce side-to-side swing of his trunk effectively.

Transmissibility

The STST for all motions are presented in figure 7. For the heave motion, coherence is significant ($p < 0.05$) for all frequencies. The magnitude of the STST increases after 1.5 Hz and reaches a resonant peak at 5 Hz. The phase of the trunk leads from 0.17-4.8 Hz and lags for all other frequencies.

For the surge motion, coherence is significant ($p < 0.05$) between 0.33-11.5 Hz. The magnitude of the STST increases after 0.8 Hz and reaches a resonant peak at 2 Hz. The phase of the trunk flips above 0.33 Hz and continues to lead up to 2 Hz, next the phase lags up to 8 Hz. For both motions the rider's trunk accelerations exceed seat accelerations by a factor of 2.


For the sway motion, coherence is significant ($p < 0.05$) between 0.33-8 Hz. At 0.33 Hz the acceleration of the trunk is approximately three times higher (magnitude = 2.8) than the seat. Between 1-8 Hz the acceleration of the trunk is lower (magnitude < 1) than the seat. The phase lag suggests that participants try to restrain the sway of the upper trunk. Participants used postural control to restrain excessive movements and prevent falling off the seat.

Apparent mass

The APMS for the heave motion (Z) are presented in figure 8. All cross-axes are included in the figure, nevertheless the analysis is mainly focused on the vertical direction (Z-axis), since this is the axis where the most dominant rider forces are present. Coherence is significant ($p < 0.05$) above 0.2 Hz for all APMS, thus this frequency is used as a base to interpret the magnitude and phase responses for this motion. At this base frequency of 0.2 Hz the magnitude is 52.08 kg* at the seat, 7.13 kg* at each footpeg and 5.23 kg* at each handlebar. The sum of all magnitudes at the base frequency is 76.8 kg, which is approximately the mean rider's weight. The vertical and longitudinal APMSs are also close to the

Table 2. Static and dynamic forces at the seat (SP), footpegs (FP) and handlebars (HB) for heave, surge and sway motion.

Interface	Heave (Z)		Surge (X)		Sway (Y)	
	Static (N)	Dynamic (N)	Static (N)	Dynamic (N)	Static (N)	Dynamic (N)
SP _Z	579	24	571	11	569	6
SP _X	66	4	63	12	66	4
SP _Y	22	1	28	1	30	11
FPL _Z	89	4	90	1	90	2
FPL _X	17	1	16	1	16	1
FPR _Z	87	4	89	1	86	2
FPR _X	17	1	16	1	16	1
HBL _Z	40	2	41	2	41	2
HBL _X	14	1	15	3	15	2
HBL _Y	42	1	51	1	41	1
HBR _Z	39	2	38	2	38	2
HBR _X	16	1	16	3	16	2
HBR _Y	33	1	34	1	28	1

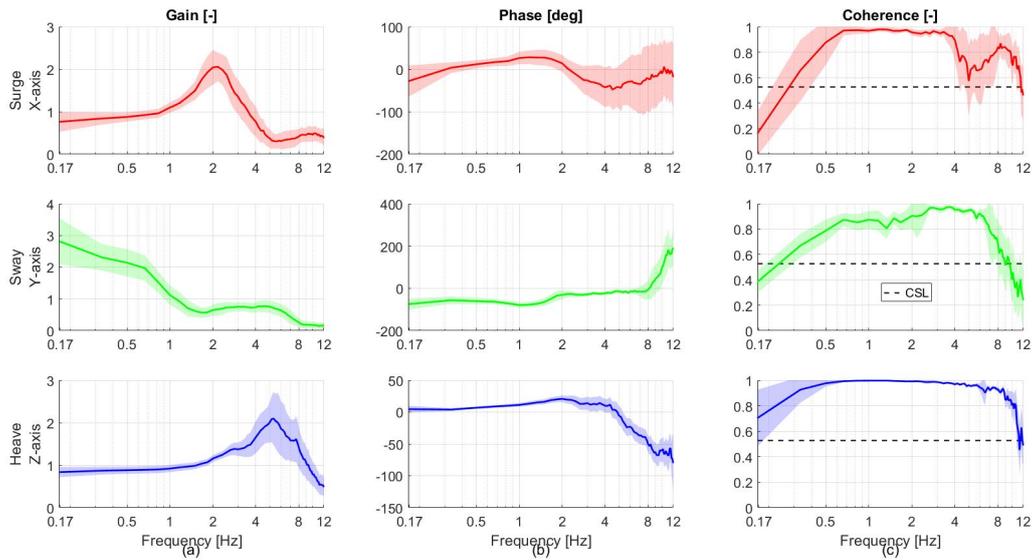**Figure 7.** Seat-to-sternum transmissibility (STST) for heave (Z, Vertical), surge (X, longitudinal) and sway (Y, lateral) motions as a function frequency (f), (a) magnitude, (b) phase and (c) coherence, shade = SD over participants, coherence is significant above the dashed line.

static loads, see table 2. The magnitudes at the seat and handlebars show a resonant peak at 5 Hz, which matches the resonance of the STST, whereas that of the footpegs is 6.3 Hz. All magnitudes above the primary resonance tend to decrease with increasing frequencies. The phase of the seat and footpegs leads between 0.5-4.6 Hz, albeit up to 2 Hz the lead is small and the phase response indicates a mass system. Above 4.6 Hz, the phase of the seat and footpegs lags with a slope of 13.7 deg/Hz. The phase of the handlebars is almost flat up to 4 Hz, onwards the phase lags and flips at 8 Hz (i.e., lag to lead). The magnitude and phase show similar trends for almost all directions and interfaces, except for the handlebars in the longitudinal direction (X-axis) where the phase leads for all frequencies. The large phase lead of the handlebars indicates that the rider exerts forces opposed to the anterior/posterior trunk movements (i.e., provoked due to the vertical motion) to keep his trunk stable in space.

The APMS measurements for the surge motion (X) are presented in figure 9. For surge, most of the dynamic forces are generated in the longitudinal direction (X-axis). Coherence is significant ($p < 0.05$) above 0.33 Hz for all APMS measurements, thus this frequency is used as a base to

interpret the magnitude and phase responses for this motion. At this reference frequency of 0.33 Hz the magnitude is 51.2 kg* at the seat, 3.16 kg* at the footpegs and 24.71 kg* at the handlebars. The magnitudes of all interfaces show a resonant peak at 2 Hz, which is the same as the resonance of the STST. At the footpegs and handlebars a second resonant peak occurs at 5 and 7 Hz, correspondingly. The sum of all measured magnitudes at the base frequency exceeds the mean rider's weight, presumably due to phase differences in forces at seat, footpegs and handlebars. The phase response up to 2 Hz indicates a mass system, but this does not apply for all the other frequencies. Onwards, the phase of the seat and handlebars lags up to 7.3 Hz and 10 Hz, respectively. The phase of the footpegs and handlebars flips at 2.8 Hz and at 5.5 Hz, respectively. The phase flips are probably caused due modulation in the control behaviour of the knee and arms. The magnitude and phases show similar trends for almost all directions and interfaces, exception are the footpegs and handlebars in the vertical direction (Z-axis) where the phase leads significantly. Similar to the heave motion the large phase lead of the footpegs and handlebars implies that the

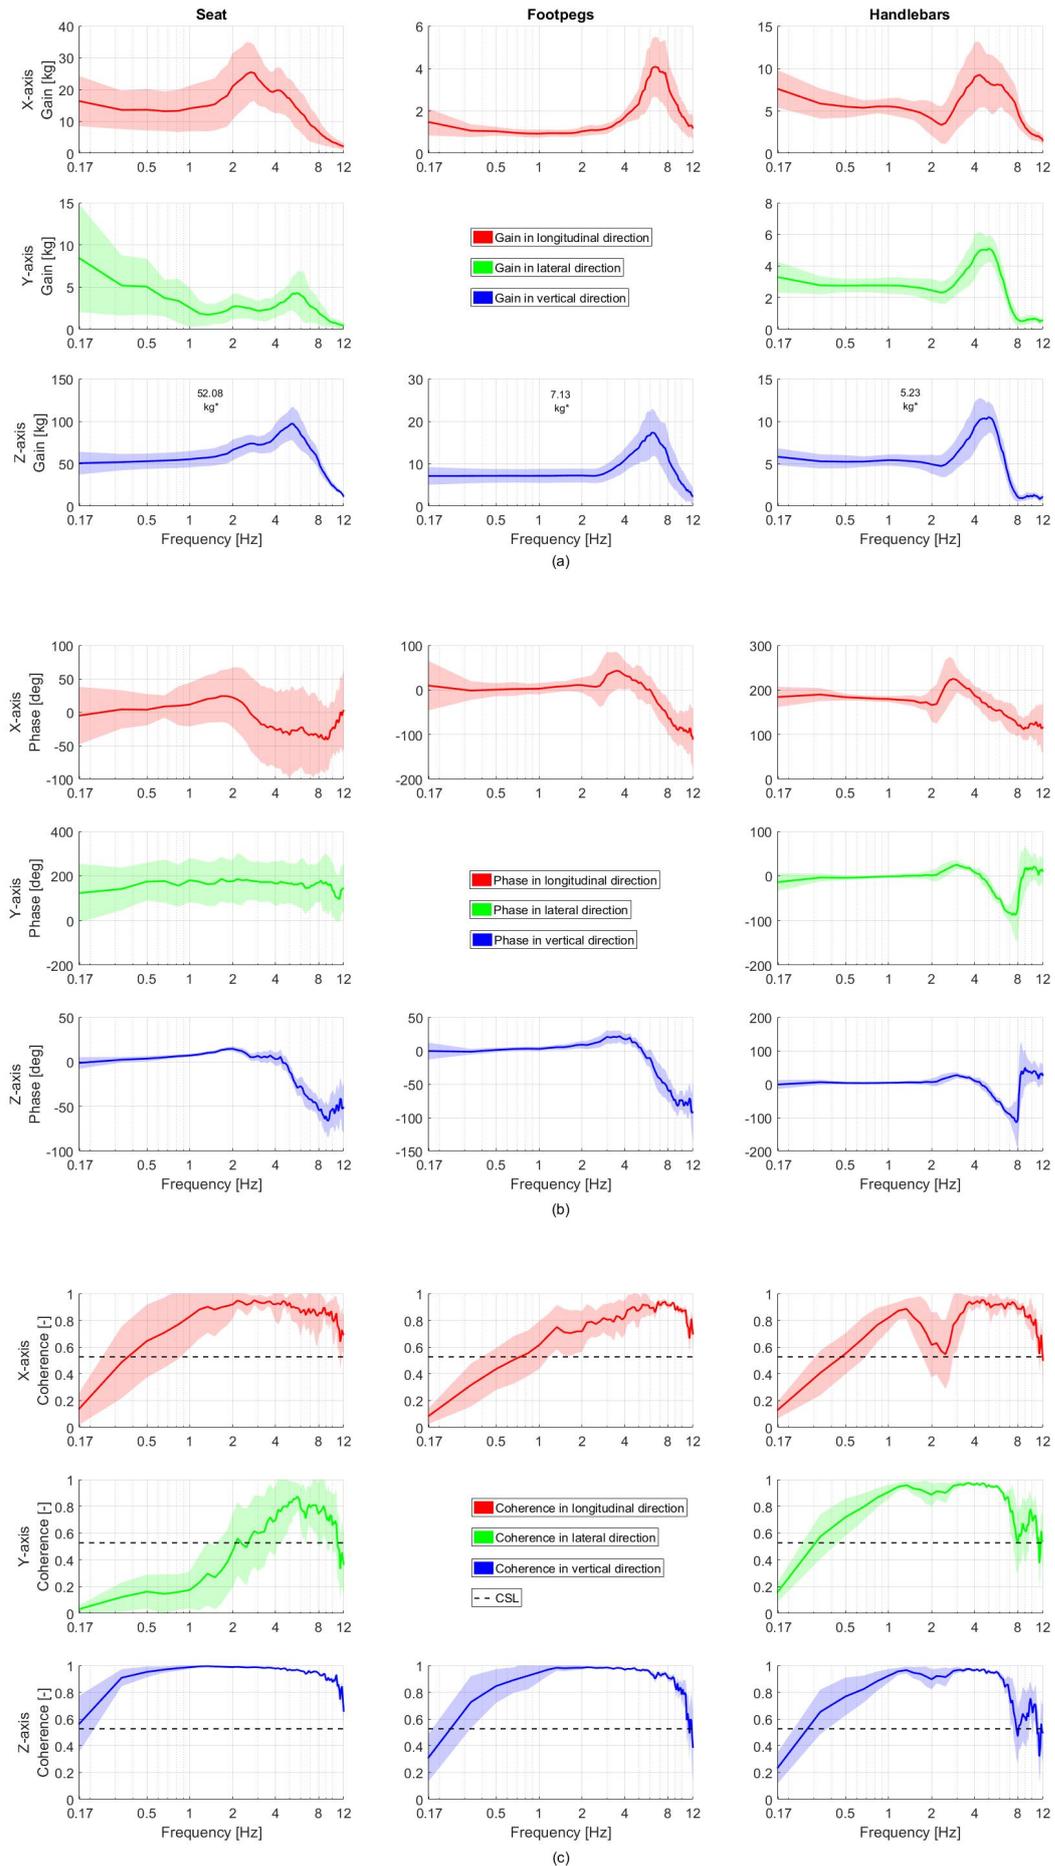


Figure 8. Apparent mass (APMS) for the heave (Z, vertical) motions as a function of the applied frequency (f) at the seat, footpegs and handlebars (a) magnitude, (b) phase and (c) coherence, shade = SD over participants.

rider applies forces oppose to the anterior/posterior pelvis and trunk movements to keep his body stable in space.

The APMS for the sway (Y) motion are presented in figure 10. For sway, most of the dominant dynamics are noticed at the seat (Y-axis), footpegs (Z-axis) and handlebars (X, Z-axis). Coherence is significant above 0.5 Hz ($p < 0.05$) for most of the frequencies. At the base frequency of 0.5 Hz the magnitude at the seat is 205.3 kg, whereas the magnitude of the footpegs and handlebars in the (X, Z-axis) is 8.86 kg, 30.49 kg, 34.86 kg, 30.52 kg, respectively. All magnitudes decrease as the frequency increases, and no resonance is observed for sway motion. The phase of the seat, footpegs and handlebars leads for all frequencies. The vertical and longitudinal directions of the footpegs and handlebar show good coherence, obviously the rider uses his feet and hands to stabilize his pelvis and trunk in space.

Discussion

Here, we measured the dynamics (STST and APMS) of a bicycle rider. To the best of our knowledge, such work has not been presented before. The APMS and STST can be used to create a biomechanical rider model. The addition of a human like model to the CarvalloWhipple bicycle model¹ is essential to explore unstable oscillatory bicycle modes and improve bicycle safety and comfort. Bicycle comfort could be improved, for example, by designing vibration isolators for the saddle and handlebars, whereas, safety by designing steering stabilizers. The selection of the stiffness and damping properties of these isolators can be obtained by analysing the eigenvalues and eigenmodes of the combined bicycle-rider system. Comfort, safety and performance can now be easily evaluated by running multiple simulations for different bicycle types (e.g., city, racing etc.). The methodology described herein is focused on the translational motions, the dynamic responses of the rider for the rotational motions might differ, even with motions that are considered similar (e.g., sway and roll).

All motions resulted in consistent transmissibility and apparent mass responses over the participants with a relatively high coherence. Therefore the system identification techniques were justified indicating FRF estimates of high quality. Heave and surge motion interacted with each other and showed similar dynamics (i.e., a result of subject leaning forward). Similar forces were observed in the ZX-plane of the seat (SP), footpegs and ZX, ZY plane of the handlebars (HB), see table 2. The vertical STST and APMS of the seat and handlebars showed a resonance at 5 Hz, in agreement with the resonance reported by Mansfield and Griffin (2002)²⁹, Toward and Griffin (2010)⁶ and Toward and Griffin (2011)⁷. The longitudinal STST and APMS had a resonance at 2 Hz, which is close to the resonance of 2.5 Hz and 2.62 Hz found for male seated subjects without backrest by Fairley and Griffin (1990)³ and Mansfield and Lundström (1999)⁴, respectively. The small resonant frequency variations could be attributed to different body masses and postures. For instance, higher body mass can lead to higher magnitudes and lower resonance^{5,6}. Holding a steering wheel could lead to lower resonance in respect with hands-in-lap posture as suggested by Wang et al. (2004)⁸, Rakheja et al. (2002)⁵ and Toward and Griffin (2010)⁶. Sway

was independent from the other two motions, the lateral STST and APMS showed similar trends: no resonance was observed and postural control was evident in both measurements.

For heave and surge the rider's body acted as a rigid mass up to 2 Hz. For sway the rider's body behaved like a horizontal mass spring-damper system (pelvis) with a torsional spring inverted pendulum (trunk) on top for all frequencies. A schematic of the system is presented in figure 11.

The high magnitude APMS (>200kg) for sway motion were perhaps a result of the angular θ trunk dynamics. The upper body center of gravity lies above the saddle requiring roll moments generated by lateral forces at saddle, footpegs and steer. To validate this explanation we first estimated the mass of the pelvis ($M_p = 15$ kg) and trunk ($M_{tr} = 45$ kg) as percentages of the mean rider's weight³⁰. Next, we used the measured accelerations and the aforementioned masses to calculate the expected forces. At the base frequency the acceleration of the trunk was about three times higher and opposed to the direction u of the saddle (see Y-axis magnitude, figure 7). Therefore, a force F_{tr} with a magnitude of about 1350 N was induced at the pelvis and applied at the saddle as a reaction to the trunk postural control. The applied saddle force F_p was possibly amplified by a factor of two due to the to the intrinsic and reflexive responses of the rider's feet and arms (stiffness K_p and damping C_p properties of the moving base). This justifies the high lateral APMS observed at the seat and in the vertical direction of the footpegs and handlebars (see Y for seat, Z-axis for footpegs and handlebars, figure 10).

As proposed by Van Drunen et al. (2015)³¹ kinematic FRFs could also be interpreted as trunk-in-space (perfectly stationary orientation in space: magnitude of 0 and phase of ± 180 deg) and trunk-on-seat (perfectly moving in line with the seat: magnitude of 1 and phase of 0 deg). For heave up to 2 Hz and for surge up 1 Hz the STST magnitude is 1 and the phase is almost 0 indicating a trunk-on-seat moving behaviour, see figure 7 (Z, vertical) and (X, longitudinal). For sway above 1 Hz the STST magnitude < 1 and the phase lags up to 8 Hz indicating that the rider tries to keep his trunk-in-space, see figure 7 (Y, lateral). The sway APMS magnitude drops further above 1 Hz, see figure 10 (Y, lateral). This can be explained by the limited STST, whereby the torso does not fully follow the saddle motion, reducing the required forces. The low frequency sway behaviour is more complex and may be studied further using models of postural control, capturing how rider's use proprioceptive, vestibular and visual feedback to generate the required roll moments to stabilize the upper body.

Conclusion

For all translational motions the bicycle rider applied forces in all 3D-directions. Heave and surge motion interacted with each other, sway showed weak interaction with heave and surge. The vertical and longitudinal APMS for almost all bicycle interfaces followed the resonance of the STST measurements. All showed a twice as high magnitude at resonance, albeit a more heavily damped system was apparent in the STST measurements. Resonant

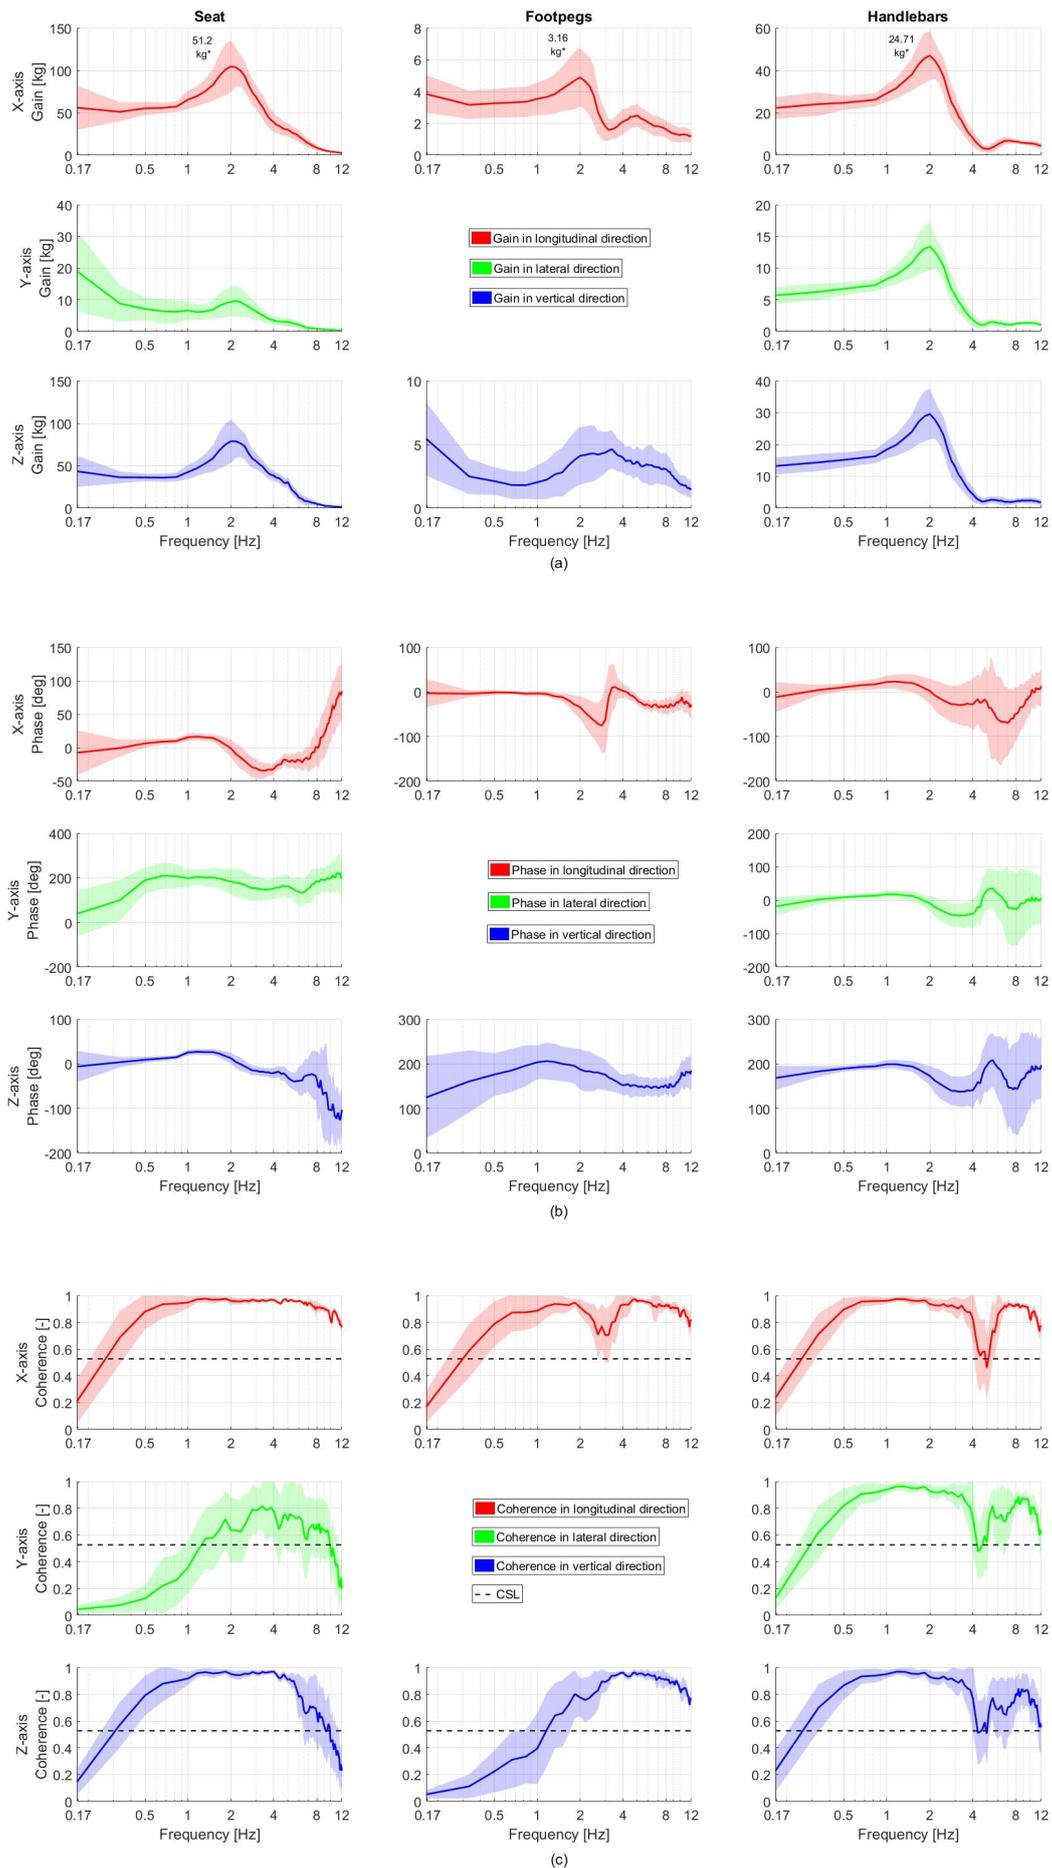


Figure 9. Apparent mass (APMS) for the surge (X, longitudinal) motions as a function of the applied frequency (f) at the seat, footpegs and handlebars (a) magnitude, (b) phase and (c) coherence, shade = SD over participants.


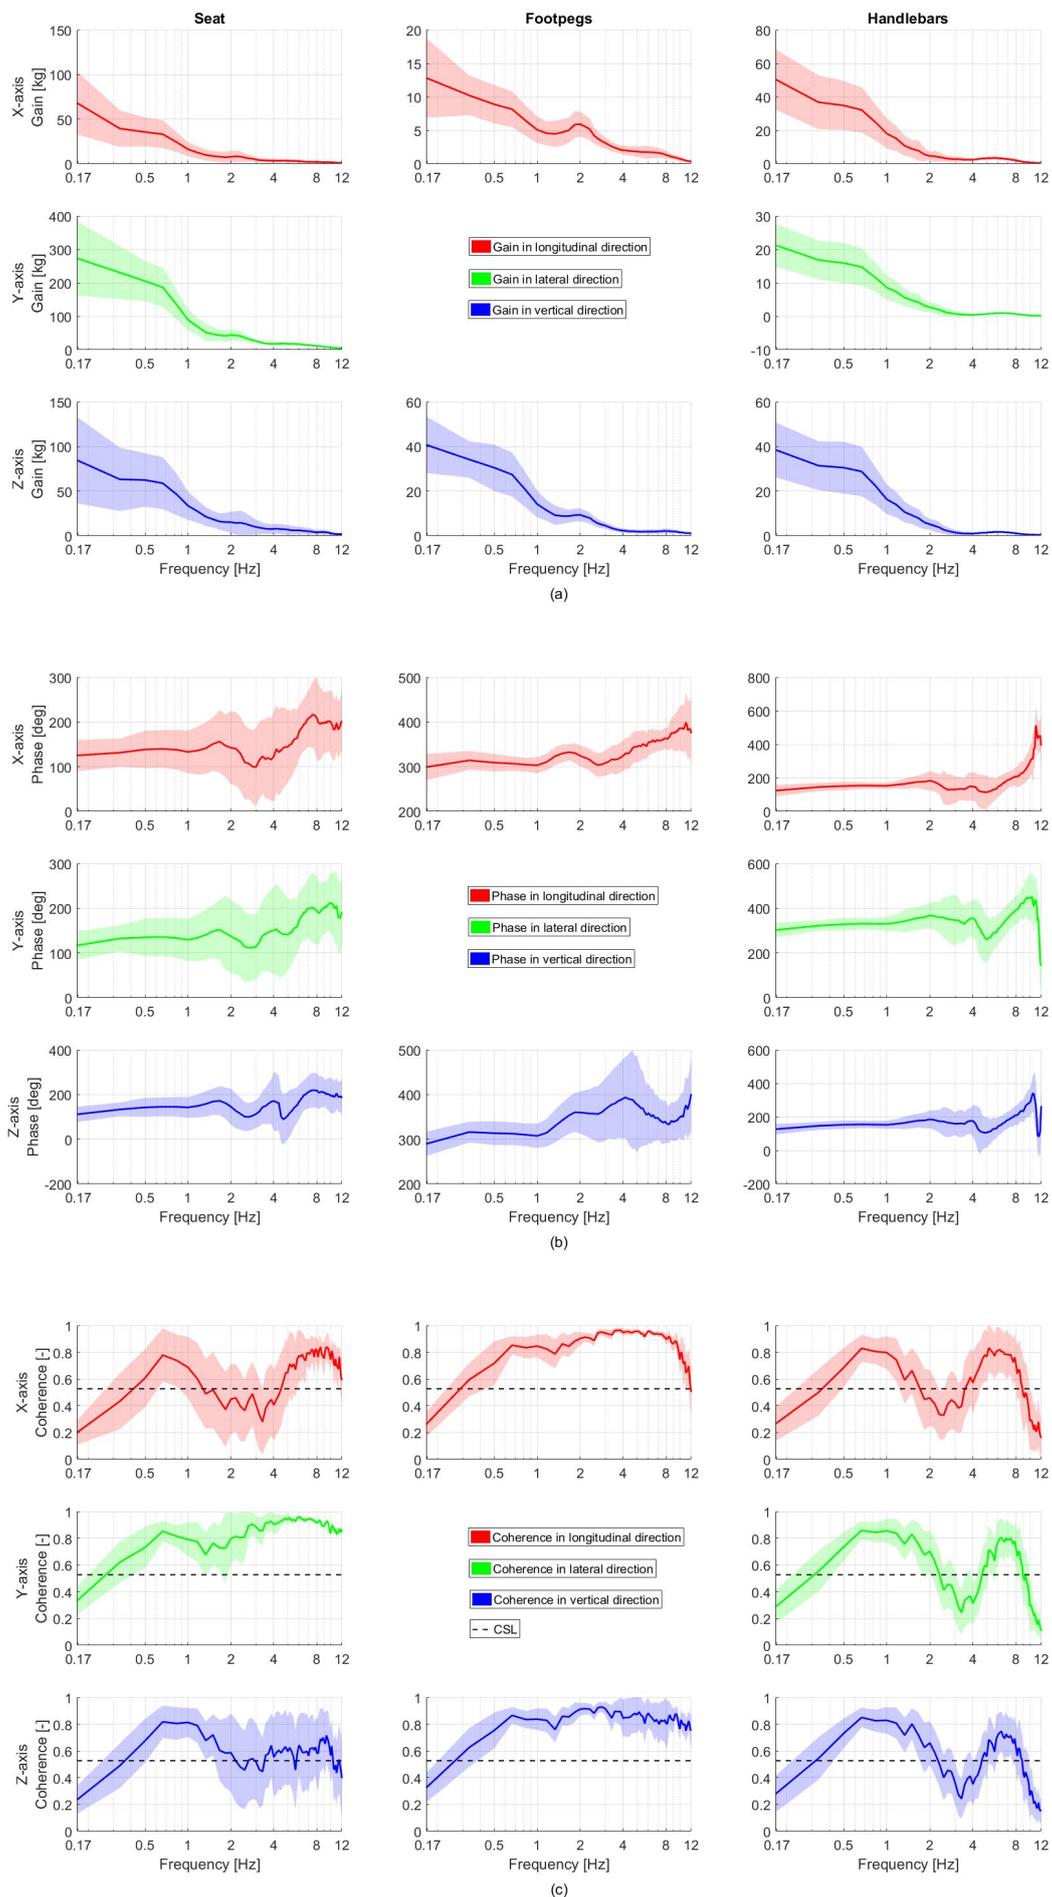


Figure 10. Apparent mass (APMS) for the sway (Y, lateral) motions as a function of frequency (f) at the seat, footpegs and handlebars (a) magnitude, (b) phase, and (c) coherence, shade = SD over participants.
preprint

M_{tr} = trunk mass 45 kg.
 M_{pel} = pelvis mass 15 kg.
 L_{tr} = distance between pelvis and trunk CoM.
 θ = rotational angle.
 K_{tr} , K_p = trunk and pelvis stiffness coefficient.
 C_p = pelvis damping coefficient.
 F_{tr} = force applied due to upper trunk motion.
 F_p = force applied due to the stiffness of the arms and feet.
 u = input signal.

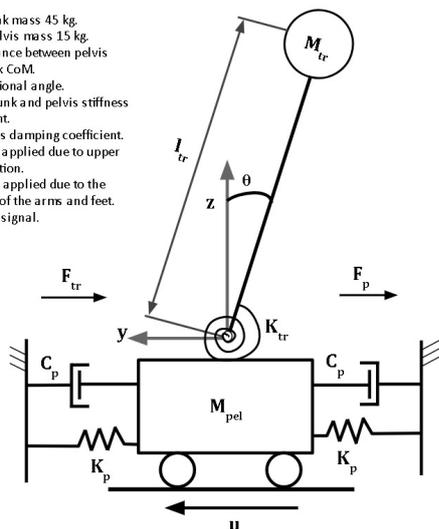

Schematic 1: Trunk-pelvis system represented as a horizontal moving inverted pendulum.

Figure 11. Schematic of horizontal mass spring-damper system with torsional spring inverted pendulum on top.

frequencies were considerably higher in the vertical direction as compared to the longitudinal direction. Lateral measurements showed no resonance, and trunk postural control was evident in the APMS measurements. For most frequencies and perturbation directions the response of the riders body was not close to a rigid mass, hence a parametric model is required to understand better the passive dynamic contribution of the rider to the bicycle-rider system.

Acknowledgements

We would like to thank the following Bsc students for their contributions; Tony Prats for his contribution in the design and building of the bicycle mock-up, and Max Greidanus, Robert Rooijmans, Koen Verbruggen, Peter Visser, Marnix van Beem, Frank van Beurden, Christian Drost, Robert Krijnen, Luc Int Zandt for their preliminary trials using multi-sine perturbations.

Declaration of conflicting interests

The authors declare that they have no conflict of interest.

Funding

We gratefully acknowledge the European Commission for their support and the Marie Curie Initial Training Network (ITN) project Nr. 608092 MOTORIST (Motorcycle Rider Integrated Safety). Website www.motorist-ptw.eu, last access: January 31, 2018.

Supplemental material

All data related to this article are available online at <https://doi.org/10.4121/uuid:826b3dbe-886d-40f7-9f67-31f801cdc2f9> (Dialynas et al., 2019).

References

- Meijaard JP, Papadopoulos JM, Ruina A et al. Linearized dynamics equations for the balance and steer of a bicycle: a benchmark and review. *Proceedings of the Royal society A: mathematical, physical and engineering sciences* 2007; 463(2084): 1955–1982.
- Plöchl M, Edelmann J, Angrosch B et al. On the wobble mode of a bicycle. *Vehicle system dynamics* 2012; 50(3): 415–429.
- Fairley T and Griffin M. The apparent mass of the seated human body in the fore-and-aft and lateral directions. *Journal of Sound and Vibration* 1990; 139(2): 299–306.
- Mansfield N and Lundström R. The apparent mass of the human body exposed to non-orthogonal horizontal vibration. *Journal of Biomechanics* 1999; 32(12): 1269–1278.
- Rakheja S, Haru I and Boileau PÉ. Seated occupant apparent mass characteristics under automotive postures and vertical vibration. *Journal of Sound and Vibration* 2002; 253(1): 57–75.
- Toward MG and Griffin MJ. Apparent mass of the human body in the vertical direction: Effect of a footrest and a steering wheel. *Journal of Sound and Vibration* 2010; 329(9): 1586–1596.
- Toward MG and Griffin MJ. Apparent mass of the human body in the vertical direction: Inter-subject variability. *Journal of Sound and vibration* 2011; 330(4): 827–841.
- Wang W, Rakheja S and Boileau PÉ. Effects of sitting postures on biodynamic response of seated occupants under vertical vibration. *International Journal of Industrial Ergonomics* 2004; 34(4): 289–306.
- Kim MS, Jeon GJ, Lee JY et al. Human response of vertical and pitch motion to vertical vibration on whole body according to sitting posture. *Journal of mechanical science and technology* 2012; 26(8): 2477–2484.
- Gao J, Hou Z, He L et al. Vertical vibration characteristics of seated human bodies and a biodynamic model with two degrees of freedom. *Science China Technological Sciences* 2011; 54(10): 2776–2784.
- Boileau PE, Rakheja S and Wu X. A body mass dependent mechanical impedance model for applications in vibration seat testing. *Journal of sound and vibration* 2002; 253(1): 243–264.
- Więckowski D. The fundamentals of biomechanical modelling in transport facilities. *Archiwum Motoryzacji* 2011; : 81–96.
- Katayama T, Aoki A, Nishimi T et al. Measurements of structural properties of riders. Technical report, SAE Technical Paper, 1987.
- Cossalter V, Doria A, Lot R et al. The effect of rider's passive steering impedance on motorcycle stability: Identification and analysis. *Meccanica* 2011; 46(2): 279–292. DOI:10.1007/s11012-010-9304-1.
- Doria A and Tognazzo M. Identification of the biomechanical parameters of the riders of two-wheeled vehicles by means of vibration testing. In *ASME 2012 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*. American Society of Mechanical Engineers, pp. 223–232.
- Doria A, Tognazzo M and Cossalter V. The response of the rider's body to roll oscillations of two wheeled vehicles; experimental tests and biomechanical models. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering* 2013; 227(4): 561–576. DOI: 10.1177/0954407012457508.
- Doria A and Tognazzo M. The influence of the dynamic response of the rider's body on the open-loop stability of a bicycle. *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*

- 2014; 228(17): 3116–3132. DOI:10.1177/0954406214527073.
18. Schwab A, Meijaard J and Kooijman J. Lateral dynamics of a bicycle with a passive rider model: stability and controllability. *Vehicle system dynamics* 2012; 50(8): 1209–1224.
 19. Webster J and Cornolo J. Comparison of european and asian morphology. In *International Conference on 3D Body Scanning Technologies Conference*. pp. 238–242.
 20. Maki B. Selection of perturbation parameters for identification of the posture-control system. *Medical and Biological Engineering and Computing* 1986; 24(6): 561–568.
 21. Ouden JVD and Schwab A. *Inventory of bicycle motion for the design of a bicycle simulator*. Master's Thesis, Delft University of Technology, 2011.
 22. Walpole SC, Prieto-Merino D, Edwards P et al. The weight of nations: an estimation of adult human biomass. *BMC Public Health* 2012; 12: 439. DOI:10.1186/1471-2458-12-439. URL <http://www.biomedcentral.com/1471-2458/12/439>.
 23. Grasgruber P, Cacek J, Kalina T et al. The role of nutrition and genetics as key determinants of the positive height trend. *Economics and Human Biology* 2014; 15: 81–100. DOI: 10.1016/j.ehb.2014.07.002.
 24. Hart SG and Staveland LE. Development of nasa-tlx (task load index): Results of empirical and theoretical research. In *Advances in psychology*, volume 52. Elsevier, 1988. pp. 139–183.
 25. Mansfield NJ. *Human response to vibration*. CRC press, 2004.
 26. Griffin MJ. *Handbook of human vibration*. Academic press, 2012.
 27. Pintelon R and Schoukens J. *System identification: a frequency domain approach*. John Wiley & Sons, 2012.
 28. Halliday D, Rosenberg J, Amjad A et al. A framework for the analysis of mixed time series/point process data-theory and application to the study of physiological tremor, single motor unit discharges and electromyograms. *Progress in biophysics and molecular biology* 1995; 64(2): 237.
 29. Mansfield N and Griffin MJ. Effects of posture and vibration magnitude on apparent mass and pelvis rotation during exposure to whole-body vertical vibration. *Journal of Sound and Vibration* 2002; 253(1): 93–107.
 30. Plagenhoef S, Evans FG and Abdelnour T. Anatomical data for analyzing human motion. *Research quarterly for exercise and sport* 1983; 54(2): 169–178.
 31. Van Drunen P, Koumans Y, van der Helm F et al. Modulation of intrinsic and reflexive contributions to low-back stabilization due to vision, task instruction, and perturbation bandwidth. *Experimental brain research* 2015; 233(3): 735–749.

Appendix

Notation

$a(f)$	acceleration at the bicycle base
$a_{body}(f), a_{base}(f)$	acceleration of upper body and bicycle base
$Coherence(f)^2$	coherence
$CSD(f)$	cross-spectral density
$E(t)$	motion platform
$F(f)$	applied forces at the bicycle interfaces
F_{tr}, F_p	force induced at the rider's trunk and pelvis
$H(t)$	passive rider
K_p, C_p	stiffness and damping properties of the moving base
$M(f)$	apparent mass
M_p, M_{tr}	mass of the rider pelvis and trunk
$n(t)$	input noise
$p(t)$	perturbation signal
$PSD(f)$	power-spectral density
$T(f)$	transmissibility
$TF_{CSD}(f)$	transfer function of cross-spectral density
$u(t)$	input signal
$y(t)$	rider output response